




Cobalt™

The Cobalt is equipped with a high-performance pressure washing system driven by a twin cylinder engine, featuring an adjustable thermostat for temperature control. It utilizes a reliable Wayne combustion burner with automatic electronic ignition, as well as a double insulated heating coil system in stainless steel housing.

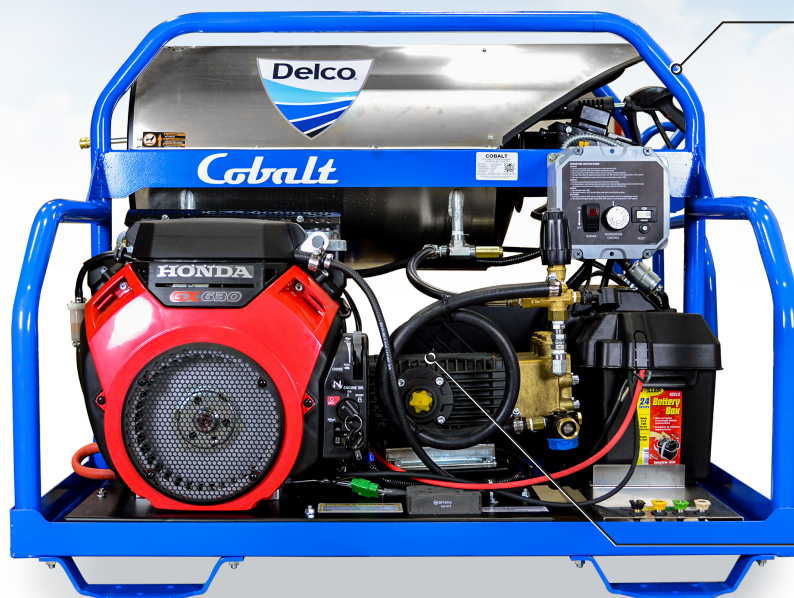

FRAME

- Heavy-duty steel base
- 1 1/2" Round tube design
- Powder coated for corrosion resistance
- Removable feet for forklift capabilities and alternative mounting options

PUMP

- Premium industrial triplex pump
- Belt driven; lower RPM
- Axialign™ Adjustment System allows the alignment and high pressure pump maintenance to be easily accomplished with a single bolt adjustment
- Overpressure safety relief valve

FEATURES

- NEMA 4X electrical enclosure with rocker switch, thermostat control and hour meter
- 1/2" Schedule 80 coil piping
- Electric start V-twin engine
- Stainless steel coil cover
- Isolated pump & engine plate with vibration dampeners
- Large capacity engine & burner fuel tanks

UNIT INCLUDES

- Pro gun handle rated 320° F
- 48" Insulated grip lance with 1/4" QC
- 3/8" x 50' Steel-braided Armor Hose™
- Stainless steel 15°, 25°, 40° and aluminum soap QC nozzles
- Downstream detergent injector



DIMENSIONS

Depth	41 3/4"
Width	45 1/4"
Height	37 1/8"

MODEL #	ENGINE	PUMP	PSI	GPM	FUEL TANK CAPACITY	FUEL TANK CAPACITY
65001	VANGUARD® 570cc	COMET	3500 PSI	5.5 GPM	8.75 gal (gas)	8.75 gal (diesel)
65002	HONDA® GX630	GENERAL PUMP®	3500 PSI	5.5 GPM	8.75 gal (gas)	8.75 gal (diesel)
65003	KOHLER® CH620	COMET	3500 PSI	5.5 GPM	8.75 gal (gas)	8.75 gal (diesel)
65004	HONDA® GX630	GENERAL PUMP®	4000 PSI	5.0 GPM	8.75 gal (gas)	8.75 gal (diesel)
65005	VANGUARD® 570cc	COMET	4000 PSI	5.0 GPM	8.75 gal (gas)	8.75 gal (diesel)
65006	VANGUARD® 570cc	GENERAL PUMP®	3500 PSI	5.5 GPM	8.75 gal (gas)	8.75 gal (diesel)

*Optional water separating fuel filter (part# 7110781) and float tank (part# 7110782)